

**KWT1 MÓDULO 1 m**  
**PIPE 1 m**

Øint	80	100	125	150	175	200	250	300
Øext	130	150	175	200	225	250	300	350
Lútil	965	965	965	965	965	965	965	965
A	29	29	29	29	29	29	29	29


**KWT0 MÓDULO 0,5 m**  
**PIPE 0,5 m**


Øint	80	100	125	150	175	200	250	300
Lútil	465	465	465	465	465	465	465	465


**KWTP MÓDULO 0,25 m**  
**PIPE 0,25 m**

Øint	80	100	125	150	175	200	250	300
Lútil	215	215	215	215	215	215	215	215


**KWTT MÓDULO 0,10 m**  
**PIPE 0,10 m**


Øint	80	100	125	150	175	200	250	300
Lútil	100	100	100	100	100	100	100	100


**KWEP MÓDULO EXTENSIBLE 0,25 A 0,35 m**  
**ADJUSTABLE PIPE 0,25 TO 0,35 m**


Øint	80	100	125	150	175	200	250	300
Lmin	250	250	250	250	250	250	250	250
Lmax	350	350	350	350	350	350	350	350


**KWEG MÓDULO EXTENSIBLE 0,35 A 0,50 m**  
**ADJUSTABLE PIPE 0,35 TO 0,50 m**


Øint	80	100	125	150	175	200	250	300
Lmin	350	350	350	350	350	350	350	350
Lmax	500	500	500	500	500	500	500	500


**KWES MÓDULO EXTENSIBLE 0,50 A 0,82 m**  
**ADJUSTABLE PIPE 0,50 TO 0,82 m**


Øint	80	100	125	150	175	200	250	300
Lmin	500	500	500	500	500	500	500	500
Lmax	820	820	820	820	820	820	820	820


**KWEL MÓDULO EXTENSIBLE 0,80 A 1,30 m**  
**ADJUSTABLE PIPE 0,80 TO 1,30 m**


Øint	80	100	125	150	175	200	250	300
Lmin	-	-	800	800	800	800	800	800
Lmax	-	-	1300	1300	1300	1300	1300	1300


**KWMS MÓDULO SILENCIADOR 1 m**  
**SILENCER PIPE 1 m**


Øint	80	100	125	150	175	200	250	300
L Útil	965	965	965	965	965	965	965	965


**KWCQ CODO 15°**  
**ELBOW 15°**


Øint	80	100	125	150	175	200	250	300
X	12	13	13	14	14	14	15	16
Y	112	114	117	121	124	127	134	140


**KWCT CODO 30°**  
**ELBOW 30°**


Øint	80	100	125	150	175	200	250	300
X	26	28	29	31	33	34	38	41
Y	116	121	127	134	140	146	159	171


**KWCC CODO 45°**  
**ELBOW 45°**


Øint	80	100	125	150	175	200	250	300
X	42	45	48	52	56	59	67	74
Y	119	126	135	144	153	161	179	197


**KWCH CODO 87°**  
**ELBOW 87°**


Øint	80	100	125	150	175	200	250	300
X	109	119	130	142	154	166	190	213
Y	133	143	155	168	180	193	218	243


**KWCN CODO 90°**  
**ELBOW 90°**


Øint	80	100	125	150	175	200	250	300
X	113	123	136	148	161	173	198	223
Y	131	141	154	166	179	191	216	241


**KWTN TE 90°**  
**TEE 90°**


Øint	80	100	125	150	175	200	250	300
L Útil	241	261	286	304	336	361	411	461
B	106	116	129	138	154	166	191	216
C	135	145	158	170	183	195	220	245


**KWTB TE 93°**  
**TEE 93°**


Øint	80	100	125	150	175	200	250	300
L Útil	293	322	347	372	460	460	487	537
B	146	160	172	185	229	225	240	265
C	135	145	158	170	183	195	220	245


**KWTC**      **TE 135°**  
**TEE 135°**


Øint	80	100	125	150	175	200	250	300
Lútil	325	353	388	424	459	495	565	636
B	258	280	306	333	359	386	439	492
C	160	178	199	220	242	263	306	348


**KWTJ**      **TE 90° INJERTO LARGO**  
**LONG TEE 90°**


Øint	80	100	125	150	175	200	250	300
Lútil	-	-	326	351	-	-	-	-
B	-	-	152	165	-	-	-	-
C	-	-	488	500	-	-	-	-


**KWTE**      **TE 135° INJERTO LARGO**  
**LONG TEE 135°**


Øint	80	100	125	150	175	200	250	300
Lútil	-	-	388	424	459	495	565	636
B	-	-	657	683	710	736	789	842
C	-	-	549	571	592	613	656	699


**KWTG**      **TE 90° 1 m CON SALIDA DE Ø80**  
**TEE 90° 1 m WITH CONNECTION Ø80**


Øint	80	100	125	150	175	200	250	300
Lútil	-	-	965	965	965	965	965	965
A	-	-	770	770	770	770	770	770
ØB	-	-	80	80	80	80	80	80


**KWTL**      **TE 90° 1 m CON SALIDA DE Ø60**  
**TEE 90° 1 m WITH CONNECTION Ø60**

Øint	80	100	125	150	175	200	250	300
Lútil	-	-	965	965	965	965	965	965
A	-	-	770	770	770	770	770	770
ØB	-	-	60	60	60	60	60	60


**KWTK**      **TE 90° 1 m CON SALIDA DOBLE DE Ø80**  
**TEE 90° 1 m WITH DOUBLE CONNECTION Ø80**

Øint	80	100	125	150	175	200	250	300
Lútil	-	-	-	-	965	965	965	965
A	-	-	-	-	770	770	770	770
ØB	-	-	-	-	60	60	60	60


**KWTM**      **TE 90° 1 m CON SALIDA DOBLE DE Ø60**  
**TEE 90° 1 m WITH DOUBLE CONNECTION Ø60**

Øint	80	100	125	150	175	200	250	300
Lútil	-	-	-	-	965	965	965	965
A	-	-	-	-	770	770	770	770
ØB	-	-	-	-	60	60	60	60


**KWTA TAPA  
LID**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	39	39	39	39	39	39	39	39


**KWTD TAPA CON DRENAJE  
LID WITH DRAIN**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	54	54	54	54	54	54	54	54


**KWTF TAPA CON DRENAJE HORIZONTAL  
LID WITH HORIZONTAL DRAIN**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	39	39	39	39	39	39	39	39


**KWMC MÓDULO DE COMPROBACIÓN 0,5 m  
CHECKING PIPE 0,5 m**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	465	465	465	465	465	465	465	465


**KWTS TE 90° 0,5M CON REGISTRO Ø100  
TEE 90° 0,5M WITH Ø100 INSPECTION DOOR**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	-	-	465	465	465	465	465	465
ØA	-	-	100	100	100	100	100	100


**KWU MÓDULO 0,5 m CON REGISTRO  
INSPECTION DOOR 0,5 m**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	-	-	465	465	465	465	465	465


**KWTR MÓDULO 0,5 m CON REGISTRO EI30  
INSPECTION DOOR 0,5 m EI30**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	-	-	465	465	465	465	465	465
A	-	-	246	246	246	246	246	246
Ød	-	-	90	100	130	150	180	200


**KWQ MÓDULO 1 m CON REGISTRO EI30  
INSPECTION DOOR 1 m EI30**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	-	-	965	965	965	965	965	965
A	-	-	496	496	496	496	496	496
Ød	-	-	90	100	130	150	180	200


**KWTI**      **TE DE INSPECCIÓN**  
**INSPECTION TEE**


Øint	80	100	125	150	175	200	250	300
Lútil	293	322	347	372	460	460	487	537
B	143	157	170	182	227	222	237	262
C	174	184	197	209	222	234	259	284


**KWMI**      **MÓDULO DE INSPECCIÓN 0,5 m**  
**INSPECTION PIPE 0,5 m**


Øint	80	100	125	150	175	200	250	300
Lútil	-	-	465	465	-	465	-	-


**KWRN**      **CODO 90° CON REGISTRO**  
**ELBOW 90° WITH REGISTER**

Øint	80	100	125	150	175	200	250	300
X	-	168	183	199	214	230	261	292
Y	-	177	192	208	223	239	270	301


**KWCR**      **COMPUERTA 0,5 m REGULACIÓN DE TIRO**  
**MANUAL DAMPER 0,5 m**


Øint	80	100	125	150	175	200	250	300
Lútil	-	-	465	465	465	465	465	465
A	-	-	90	90	90	90	90	90


**KWDA**      **COMPUERTA 0,5 m CON TIRADOR**  
**HANDLE DAMPER 0,5 m**


Øint	80	100	125	150	175	200	250	300
Lútil	465	465	465	465	465	465	465	574
A	100	100	100	100	100	100	100	100


**KWET**      **ESTABILIZADOR DE TIRO**  
**DRAUGHT STABILISER**


Øint	80	100	125	150	175	200	250	300
B	188	188	188	188	188	217	133	133


**KWCP**      **CAPERUZA**  
**RAIN CAP**


Øint	80	100	125	150	175	200	250	300
B	220	243	262	284	358	342	390	413
C	250	300	350	400	500	500	600	660


**KWCPM**      **CAPERUZA CON MALLA**  
**CAP WITH MESH**


Øint	80	100	125	150	175	200	250	300
B	220	243	262	284	358	342	390	413
C	250	300	350	400	500	500	600	660


**KWCA**      **CAPERUZA ANTIRREVOCO**  
**ANTI-WIND COWL**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	225	235	245	250	265	275	285	300
C	250	300	300	350	375	430	480	530


**KWCB**      **CAPERUZA ANTIRREVOCO CON REJILLA**  
**ANTI-WIND COWL WITH GRID**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	244	262	259	267	280	290	305	320
C	250	300	300	350	375	430	480	530


**KWCD**      **CAPERUZA ANTI-VIENTO**  
**ANTI-WIND TERMINAL**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	220	220	238	238	238	248	284	300
C	200	250	250	300	350	400	500	600


**HIMC**      **MALLA PARA CAPERUZA ANTIVIENTO**  
**MESH FOR ANTI-WIND TOP TERMINAL**


$\varnothing$	80	100	125	150	175	200	250	300
A	120	120	135	135	135	145	155	165
$\varnothing B$	137	157	181	207	232	257	307	357


**KWCO**      **CONO DE SALIDA**  
**CONE**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	190	190	190	190	190	190	190	190


**KWMA**      **MANGUITO CUBRE-AISLANTE**  
**INSULATION COVER PLATE**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
A	55	55	55	55	55	55	55	55


**KWCG**      **CAPERUZA GIRATORIA**  
**ROTATING CAP**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	220	225	231	238	268	286	290	-
C	200	250	250	300	315	315	400	-


**KWAA**      **AUTO-ASPIRADOR**  
**ROTATING COWL**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	400	400	400	400	400	400	480	480
C	270	270	270	270	270	270	380	380


**KWJE CAPERUZA JET**  
**JET CAP**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	-	-	369	413	456	500	588	675
C	-	-	272	310	349	388	465	543


**KWCF TERMINACIÓN EN H**  
**H COWL**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
A	-	-	500	625	-	-	-	-
B	-	-	245	320	-	-	-	-
C	-	-	127	152	-	-	-	-
D	-	-	59	85	-	-	-	-
E	-	-	280	300	-	-	-	-
F	-	-	295	295	-	-	-	-


**KWTH TERMINAL HORIZONTAL CON REJILLA**  
**HORIZONTAL END WITH MESH**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
B	188	202	220	237	255	272	307	342


**KWMM MANGUITO MACHO - MACHO**  
**COUPLING MALE - MALE**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	50	50	50	50	50	50	50	-


**KWHH MANGUITO HEMBRA - HEMBRA**  
**COUPLING FEMALE - FEMALE**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
L útil	120	120	120	120	120	120	120	120


**KWAM AMPLIACIÓN**  
**INCREASER**


$\varnothing_{Aint}$	80	100	125	150	175	200	250	300
$\varnothing_{Bint}$	100	125	150	175	200	250	300	350
L útil	188	188	188	188	188	188	188	-


**KWAM AMPLIACIÓN 2 DIÁMETROS**  
**INCREASER 2 DIAMETERS**


$\varnothing_{Aint}$	80	100	125	150	175	200	250	300
$\varnothing_{Bint}$	125	150	175	200	250	300	350	400
L útil	188	188	188	188	223	263	-	-


**KWAM AMPLIACIÓN 3 DIÁMETROS**  
**INCREASER 3 DIAMETERS**


$\varnothing_{Aint}$	80	100	125	150	175	200	250	300
$\varnothing_{Bint}$	150	175	200	250	300	350	400	450
L útil	223	223	223	263	300	-	-	-


**KWRE REDUCCIÓN**  
**REDUCER**


$\varnothing A_{int}$	-	100	125	150	175	200	250	300
$\varnothing B_{int}$	-	80	100	125	150	175	200	250
Lútil	-	188	188	188	188	188	188	188


**KWRE REDUCCIÓN 2 DIÁMETROS**  
**REDUCER 2 DIAMETERS**


$\varnothing A_{int}$	-	-	125	150	175	200	250	300
$\varnothing B_{int}$	-	-	80	100	125	150	175	200
Lútil	-	-	188	188	188	188	223	263


**KWRE REDUCCIÓN 3 DIÁMETROS**  
**REDUCER 3 DIAMETERS**


$\varnothing A_{int}$	-	-	-	150	175	200	250	300
$\varnothing B_{int}$	-	-	-	80	100	125	150	175
Lútil	-	-	-	223	223	223	263	300


**KWSB SOPORTE BASE REGULABLE DE 50 A 80 mm**  
**ADJUSTABLE BASE SUPPORT FROM 50 TO 80 mm**


$\varnothing_{int}$	80	100	125	150	175	200	250	300
Lútil	214	214	214	214	214	214	214	214
Bmin	50	50	50	50	50	50	50	50
Bmax	80	80	80	80	80	80	80	80


**KWSR SOPORTE BASE REGULABLE DE 80 A 280 mm**  
**ADJUSTABLE BASE SUPPORT FROM 80 TO 280 mm**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
Lútil	214	214	214	214	214	214	214	214
Bmin	80	80	80	80	80	80	80	80
Bmax	280	280	280	280	280	280	280	280


**KWSP PLACA DE SOPORTE BASE**  
**CONSOLE PLATE**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
Lútil	124	124	124	124	124	124	124	124
B	80	80	80	80	80	80	80	80



**KWSU MANGUITO UNIVERSAL A KW CON PLACA**  
**KW TOPHAT ADAPTER TO SIMPLE WALL**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
$\varnothing_{univ.}$	78	98	123	148	173	198	248	298
B	320	320	320	320	320	320	320	320
C	250	250	250	250	250	250	250	250



**KWSS SOPORTE SUELO**  
**FLOOR SUPPORT**

$\varnothing_{int}$	80	100	125	150	175	200	250	300
Lútil	209	209	209	209	209	209	209	209
B	190	190	190	190	190	190	190	190




**HISA SOPORTE MURAL REGULABLE 50 A 80 mm**  
**ADJUSTABLE WALL SUPPORT 50 TO 80 mm**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
Amin	50	50	50	50	50	50	50	50
Amax	80	80	80	80	80	80	80	80
B	30	30	40	40	40	40	40	40

**HIS1 SOPORTE MURAL REGULABLE 80 A 130 mm**  
**ADJUSTABLE WALL SUPPORT 80 TO 130 mm**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
Amin	80	80	80	80	80	80	80	80
Amax	130	130	130	130	130	130	130	130
B	30	30	40	40	40	40	40	40

**HIS2 SOPORTE MURAL REGULABLE 130 A 210 mm**  
**ADJUSTABLE WALL SUPPORT 130 TO 210 mm**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
Amin	130	130	130	130	130	130	130	130
Amax	210	210	210	210	210	210	210	210
B	30	30	40	40	40	40	40	40

**HIS4 SOPORTE MURAL REGULABLE 80 A 440 mm**  
**ADJUSTABLE WALL SUPPORT 80 TO 440 mm**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
Amin	130	130	130	130	130	130	130	130
Amax	210	210	210	210	210	210	210	210
B	30	30	40	40	40	40	40	40

**HIS5 SOPORTE DE ESQUINA**  
**CORNER WALL SUPPORT**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
Amin	270	270	270	270	270	270	270	270
Amax	520	520	520	520	520	520	520	520
B	30	30	40	40	40	40	40	40

**HISF SOPORTE FORJADO**  
**JOIST SUPPORT**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
A	150	150	150	150	150	150	150	150
B	30	30	40	40	40	40	40	40

**HIST SOPORTE TEJADO**  
**ROOF SUPPORT**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
A	150	150	150	150	150	150	150	150
B	40	40	40	40	40	40	40	40

**HISV SOPORTE TEJADO REFORZADO**  
**REINFORCED ROOF SUPPORT**



$\varnothing_{ext}$	130	150	175	200	225	250	300	350
A	642	662	687	712	737	762	812	862
B	80	80	80	80	80	80	80	80
C	150	150	150	150	150	150	150	150


**HISN SOPORTE 1 m PARA ESTRUCTURA MADERA**  
**SUPPORT FOR WOODEN JOIST 1 m**


$\phi_{ext}$	130	150	175	200	225	250	300	350
$\phi A$	130	150	175	200	225	250	300	350
B	1000	1000	1000	1000	1000	1000	1000	1000


**HISH SOPORTE PARA MONTAJE HORIZONTAL INOX.**  
**HORIZONTAL SUPPORT**


$\phi_{ext}$	130	150	175	200	225	250	300	350
B	30	30	40	40	40	40	40	40


**HIAV ABRAZADERA DE VIENTOS**  
**ANTI-WIND LOCKING BAND**


$\phi_{ext}$	130	150	175	200	225	250	300	350
B	30	30	40	40	40	40	40	40


**HITV TIRAVIENTOS DE TUBO**  
**ROOF BRACE KIT**

$\phi_{ext}$	130	150	175	200	225	250	300	350
Amin	1250	1250	1250	1250	1250	1250	1250	1250
Amax	2300	2300	2300	2300	2300	2300	2300	2300
B	30	30	40	40	40	40	40	40


**HIB1 SOPORTE MURAL ARTICULADO REGULABLE 50 A 90 mm**  
**PREMIUM WALL BRACKET ADJUSTABLE 50 TO 90 mm**


$\phi_{ext}$	130	150	175	200	225	250	300	350
Amin	50	50	50	50	50	50	50	50
Amax	90	90	90	90	90	90	90	90
B	40	40	40	40	40	40	40	40


**HIB2 SOPORTE MURAL ARTICULADO REGULABLE 90 A 200 mm**  
**PREMIUM WALL BRACKET ADJUSTABLE 90 TO 200 mm**


$\phi_{ext}$	130	150	175	200	225	250	300	350
Amin	90	90	90	90	90	90	90	90
Amax	200	200	200	200	200	200	200	200
B	40	40	40	40	40	40	40	40


**KWAP ABRAZADERA AUTOPORTANTE**  
**STRUCTURAL LOCKING BAND**

$\phi_{int}$	80	100	125	150	175	200	250	300
B	145	145	145	145	145	145	145	145



**HIWPC PLACA CORTA-FUEGOS INOX.**  
**INOX. FIRE-STOP PLATE**

$\phi_{ext}$	130	150	175	200	225	250	300	350
A	140	160	185	210	235	260	310	360
B	272	292	317	342	367	392	442	492
C	232	252	277	302	327	352	402	452




**HIWPV** PLACA CORTA-FUEGOS INOX. VENTILADA  
VENTILATED FIRE-STOP PLATE

∅ext	130	150	175	200	225	250	300	350
A	140	160	185	210	235	260	310	360
B	272	292	317	342	367	392	442	492
C	232	252	277	302	327	352	402	452




**HGWPV** PLACA CORTA-FUEGOS VENTILADA BLANCA GALVA  
WHITE GALVANIZED VENTILATED FIRE-STOP PLATE

∅ext	130	150	175	200	225	250	300	350
A	140	160	185	210	235	260	-	-
B	272	292	317	342	367	392	-	-
C	232	252	277	302	327	352	-	-




**HICP** CUBRE PLACA CORTA-FUEGOS BLANCA  
WHITE FIRE-STOP COVER PLATE

∅ext	130	150	175	200	225	250	300	350
A	140	160	185	210	235	260	310	360
B	297	317	342	367	392	417	467	517
C	15	15	15	15	15	15	15	15




**HIPK** PLACA CON GOMA 0 A 45°  
OVAL RUBBER PLATE 0 TO 45°

∅ext	130	150	175	200	225	250	300	350
A	158	178	203	228	253	278	-	-
B	200	225	260	290	325	355	-	-
∅C	95	115	140	165	190	215	-	-
D	490	490	490	490	490	490	-	-




**HIPE** PLACA EMBELLECEDORA 0° A 30°  
INOX. FINISHING PLATE 0° TO 30°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	315	335	415	440	465	490	540	590
C	90	90	90	90	90	90	90	90




**HIPB** PLACA EMBELLECEDORA 30° A 45°  
INOX. FINISHING PLATE 30° A 45°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	315	335	415	440	465	490	540	590
C	90	90	90	90	90	90	90	90




**HIPS** PLACA EMBELLECEDORA REDONDA 90°  
INOX. ROUND FINISHING PLATE 90°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	288	308	333	358	383	408	458	508
C	75	75	75	75	75	75	75	75




**HIPT** PLACA EMBELLECEDORA REDONDA 45°  
INOX. ROUND FINISHING PLATE 45°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	288	308	333	358	383	408	458	508
C	75	75	75	75	75	75	75	75




**HIPU** PLACA EMBELLECEDORA REDONDA 150 A 90°  
INOX. ROUND FINISHING PLATE 150 - 90°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	433	453	478	503	528	553	603	653
C	150	150	150	150	150	150	150	150




**HIPW** PLACA EMBELLECEDORA REDONDA 150 A 45°  
INOX. ROUND FINISHING PLATE 150 - 45°

∅ext	130	150	175	200	225	250	300	350
A	135	155	180	205	230	255	305	355
B	433	453	478	503	528	553	603	653
C	150	150	150	150	150	150	150	150




**HIPQ** PLACA EMBELLECEDORA 1 PIEZA 90°  
1 PIECE ROUND FINISHING PLATE 90°

∅ext	130	150	175	200	225	250	300	350
∅A	139	159	185	210	235	260	310	360
∅B	289	309	335	360	385	410	460	510



**HIPR** PLACA EMBELLECEDORA 1 PIEZA 45°  
1 PIECE ROUND FINISHING PLATE 45°

∅ext	130	150	175	200	225	250	300	350
A	135	155	181	206	231	256	306	356
B	183	211	246	283	318	353	423	494
C	289	309	335	360	385	410	460	510
D	337	365	400	437	472	507	577	648



**HITJ** TAPAJUNTAS  
JOINT COVER

∅ext	130	150	175	200	225	250	300	350
A	40	40	40	40	50	50	50	50
B	15	15	15	15	15	15	15	15



**HIPM** PASAMUROS  
WALL SLEEVE


∅ext	130	150	175	200	225	250	300	350
∅A	150	175	200	225	250	300	350	400
B	325	325	325	325	325	325	325	325


**HGNA PASAMUROS 45° EXTENSIBLE GALVA**  
**WALL SLEEVE 45° ADJUSTABLE GALVA**


Øext	130	150	175	200	225	250	300	350
A	150	175	200	225	250	300	325	375
Bmin	200	200	200	200	200	200	200	200
Bmax	350	350	350	350	350	350	350	350


**HICO COQUILLA PASO FORJADOS**  
**INSULATE ROOF SLEEVE**


Øext	130	150	175	200	225	250	300	350
ØA	290	310	335	360	-	410	-	-
B	400	400	400	400	-	400	-	-


**HICU CUBRE-AGUAS ALUMINIO 0 A 35° + COLLARÍN ANTILLUVIA**  
**ALUMINIUM FLASHING 0 TO 35° + STORM COLLAR**

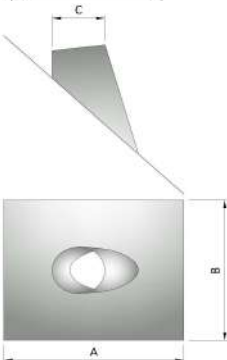
Øext	130	150	175	200	225	250	300	350
B	152	160	170	180	190	200	220	250
C	155	175	200	225	250	275	325	375
D	234	257	294	321	349	376	431	503


**HICR CUBREAGUAS PLOMO AJUSTABLE 0°- 20°**  
**LEAD FLASHING 0°- 20°**


Øext	130	150	175	200	225	250	300	350
A	676	697	724	750	786	813	865	917
B	655	675	700	725	750	775	825	875
C	140	160	185	210	245	270	320	370


**HICS CUBREAGUAS PLOMO AJUSTABLE 20°- 45°**  
**LEAD FLASHING 20°- 45°**


Øext	130	150	175	200	225	250	300	350
A	758	786	820	855	903	1000	1000	1000
B	655	675	700	725	750	775	825	875
C	140	160	185	210	245	270	320	370


**HICT CUBREAGUAS PLOMO AJUSTABLE 45°- 60°**  
**LEAD FLASHING 45°- 60°**

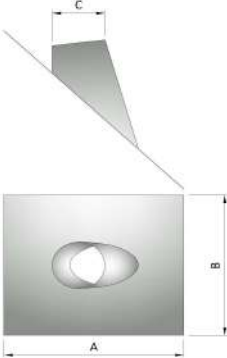
Øext	130	150	175	200	225	250	300	350
A	815	855	904	953	1000	1000	1000	1000
B	655	675	700	725	750	775	825	875
C	140	160	185	210	245	270	320	370


**HICW CUBREAGUAS GOMA 0°- 20°**  
**RUBBER FLASHING 0°- 20°**


Øext	130	150	175	200	225	250	300	350
A	676	697	724	750	786	813	865	917
B	655	675	700	700	700	775	800	800
C	140	160	185	210	245	270	320	370


**HICX CUBREAGUAS GOMA 20°- 45°**  
**RUBBER FLASHING 20°- 45°**

Øext	130	150	175	200	225	250	300	350
A	758	786	820	840	840	1000	1000	1000
B	655	675	700	700	700	775	800	800
C	140	160	185	210	245	270	320	370


**HICY CUBREAGUAS GOMA 45°- 60°**  
**RUBBER FLASHING 45°- 60°**

Øext	130	150	175	200	225	250	300	350
A	815	840	840	953	1000	1000	1000	1000
B	655	675	700	725	750	775	800	800
C	140	160	185	210	245	270	320	370


**HILL COLLARÍN ANTILLUVIA**  
**STORM COLLAR**


Ønom	130	150	175	200	225	250	300	350
Øext	205	225	275	300	325	350	400	450
Øint	130	150	175	200	225	250	300	350
A	75	75	100	100	100	100	100	100


**HILM COLLARÍN ANTILLUVIA CORTO**  
**SHORT STORM COLLAR**


Ønom	130	150	175	200	225	250	300	350
Øext	256	276	302	326	351	376	426	476
Øint	131	151	176	201	226	251	301	351
A	32	32	32	32	32	32	32	32


**KWSD MANGUITO DE UNIÓN BI A KW**  
**ADAPTOR BI TO KW**


Øint	80	100	125	150	175	200	250	300
ØBI	80	100	125	150	175	200	250	300
Lútil	134	134	134	134	134	134	134	134


**KWDS MANGUITO DE UNIÓN KW A BI**  
**ADAPTOR KW TO BI**


Øint	80	100	125	150	175	200	250	300
ØBI	80	100	125	150	175	200	250	300
Lútil	140	140	140	140	140	140	140	140


**KWVD MANGUITO VB A KW**  
**ADAPTOR VB TO KW**


Øint	80	100	125	150	175	200	250	300
ØVB	80	100	125	150	175	200	250	300
Lútil	100	100	-	-	-	-	-	-


**KWDV MANGUITO KW A VB  
ADAPTOR KW TO VB**


Øint	80	100	125	150	175	200	250	300
ØVB	80	100	125	150	175	200	250	300
Lútil	170	170	170	170	170	170	170	-


**KWKVA EXTENSIBLE VITRIFICADO A KW DE 0,5 m  
CONNECTING PIPE STARTER LENGHT 0,5 m**


Øint	80	100	125	150	175	200	250	300
ØVB	80	100	125	150	175	200	250	300
Lútil	465	465	465	465	465	465	-	-


**KWKWV EXTENSIBLE VITRIFICADO A KW DE 1 m  
CONNECTING PIPE STARTER LENGHT 1 m**

Øint	80	100	125	150	175	200	250	300
ØVB	80	100	125	150	175	200	250	300
Lútil	965	965	965	965	965	965	-	-


**KWAR KW ADAPTADOR AJUSTABLE 0,5 m  
ADJUSTABLE CONNECTING PIPE 0,5 m**


Øint	80	100	125	150	175	200	-	-
Øuniv	78	98	123	148	173	198	-	-
Lmin	-	-	470	470	-	-	-	-
Lmax	-	-	605	605	-	-	-	-


**KWAT KW ADAPTADOR AJUSTABLE 1 m  
ADJUSTABLE CONNECTING PIPE 1 m**


Øint	80	100	125	150	175	200	-	-
Øuniv	78	98	123	148	173	198	-	-
Lmin	-	-	970	970	-	-	-	-
Lmax	-	-	1105	1105	-	-	-	-


**KWAC ADAPTADOR AJUSTABLE 0,5 m CON CODO 45°  
ADJUSTABLE CONNECTING PIPE 0,5 m WITH ELBOW 45°**


Øint	80	100	125	150	175	200	-	-
Øuniv	78	98	123	148	173	198	-	-
Lmin	-	-	450	450	-	-	-	-
Lmax	-	-	575	575	-	-	-	-


**KWSDM ADAPTADOR A CALDERA MACHO  
MALE BOILER ADAPTOR**


Øint	80	100	125	150	175	200	250	300
Øuniv	78	98	123	148	173	198	248	298
Lútil	169	169	169	169	169	169	169	169


**KWSAM ADAPTADOR A CALDERA MACHO AMPLIADO  
INCREASER MALE BOILER ADAPTOR**


Øint	-	100	125	150	175	200	250	300
Øuniv	-	78	98	123	148	173	198	248
Lútil	-	169	169	169	169	169	169	169


**KWME ADAPTADOR A CALDERA MACHO PLANO 1 m**  
**FLAT MALE BOILER ADAPTOR 1 m**


Øint	80	100	125	150	175	200	250	300
Øuniv	78	98	123	148	173	198	248	298
Lútil	924	924	924	924	924	924	924	924


**KWMD ADAPTADOR A CALDERA MACHO PLANO**  
**FLAT MALE BOILER ADAPTOR**


Øint	80	100	125	150	175	200	250	300
Øuniv	78	98	123	148	173	198	248	298
Lútil	44	44	44	44	44	44	44	44


**KWMB ADAPTADOR A CALDERA MACHO PLANO AMPLIADO**  
**INCREASER FLAT MALE BOILER ADAPTOR**


Øint	80	100	125	150	175	200	250	300
Øuniv	-	78	98	123	148	173	198	248
Lútil	-	64	64	64	64	64	64	64


**KWAD ADAPTADOR A CALDERA TIPO 1**  
**BOILER ADAPTOR TYPE 1**

Øint	80	100	125	150	175	200	250	300
B.C	80÷95	100÷115	125÷140	150÷165	175÷190	200÷215	250÷255	300÷315
Lútil	159	159	159	159	159	159	159	159


**KWAD ADAPTADOR A CALDERA TIPO 2**  
**BOILER ADAPTOR TYPE 2**

Øint	80	100	125	150	175	200	250	300
B.C	-	80÷95	80÷120	100÷145	125÷170	150÷195	200÷245	250÷295
Lútil	-	159	159	159	159	159	159	159


**KWAD ADAPTADOR A CALDERA TIPO 3**  
**BOILER ADAPTOR TYPE 3**

Øint	80	100	125	150	175	200	250	300
B.C	100÷125	120÷145	145÷170	170÷195	195÷220	220÷245	270÷295	320÷345
Lútil	184	184	184	184	184	184	184	184






**KXT1 MÓDULO 1 M**

**KAT1 PIPE 1 M**


Øint	125	150	175	200	250	300	350	400	450	500	550	600
Øext	175	200	225	250	300	350	400	450	500	550	600	650
L útil	965	965	965	965	965	965	950	950	950	950	950	950
A	29	29	29	29	29	29	40	40	40	40	40	40



**KXT0 MÓDULO 0,5 M**

**KATO PIPE 0,5 M**


Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	465	465	465	465	465	465	450	450	450	450	450	450



**KXTP MÓDULO 0,25 M**

**KATP PIPE 0,25 M**


Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	215	215	215	215	215	215	200	200	200	200	200	200



**KXE5 MÓDULO EXTENSIBLE 0,50 A 0,82 M**

**KAES ADJUSTABLE PIPE 0,50 TO 0,82 M**

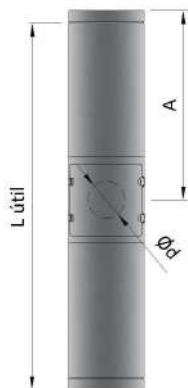
Øint	125	150	175	200	250	300	350	400	450	500	550	600
L min	500	500	500	500	500	500	500	500	500	500	500	500
L max	820	820	820	820	820	820	820	820	820	820	820	820



**KXEG MÓDULO EXTENSIBLE 0,35 A 0,50 M**

**KAEG ADJUSTABLE PIPE 0,35 TO 0,50 M**


Øint	125	150	175	200	250	300	350	400	450	500	550	600
L min	350	350	350	350	350	350	350	350	350	350	350	350
L max	500	500	500	500	500	500	500	500	500	500	500	500



**KXTQ TRAMO 1M CON REGISTRO**

**KATQ PIPE 1M WITH REGISTER**


Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	965	965	965	965	965	965	948	948	948	948	948	948
A	496	496	496	496	496	496	495	495	495	495	495	495
Ød	90	100	130	150	180	200	220	220	220	220	220	220



**KXTR TRAMO 0,5M CON REGISTRO**


**KATR PIPE 0,5M WITH REGISTER**

Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	465	465	465	465	465	465	448	448	448	448	448	448
A	246	246	246	246	246	246	245	245	245	245	245	245
Ød	90	100	130	150	180	200	220	220	220	220	220	220




**KXCQ** CODO 15°  
**KACQ** ELBOW 15°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
X	11	11	11	12	13	13	16	17	18	19	19	20
Y	112	115	118	121	128	134	167	173	180	186	189	199




**KXCT** CODO 30°  
**KACT** ELBOW 30°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
X	26	28	30	31	35	38	45	48	52	55	58	62
Y	130	136	142	148	161	173	211	224	236	249	259	274




**KXCC** CODO 45°  
**KACC** ELBOW 45°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
X	48	52	56	59	67	74	81,4	91,5	98,8	106	113	121
Y	143	152	161	169	187	205	240	265	283	300	318	336




**KXCN** CODO 90°  
**KACN** ELBOW 90°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
X	138	150	163	175	200	225	286	311	336	361	386	453
Y	167	179	192	204	229	254	330	355	380	405	430	497



**KXTC** TE 135°  
**KATC** TEE 135°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	388	424	459	495	565	636	722	792	941	941	1005	1075
B	306	333	359	386	439	492	551	604	657	710	763	816
C	199	220	242	263	306	348	412	455	497	540	583	625



**KXTN** TE 90°  
**KATN** TEE 90°

Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	286	304	336	361	411	461	536	586	636	686	736	786
B	129	138	154	166	191	216	246	271	296	321	346	371
C	158	170	183	195	220	245	290	315	340	365	390	415




**KXTA** TAPA  
**KATA** LID

Øint	125	150	175	200	250	300	350	400	450	500	550	600
B	46	46	46	46	46	46	50	50	50	50	50	50




**KXTD** TAPA CON DRENAJE  
**KATD** LID WITH DRAIN

Øint	125	150	175	200	250	300	350	400	450	500	550	600
B	46	46	46	46	46	46	50	50	50	50	50	50




**KXCP** CAPERUZA  
**KACP** CAP

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
B	272	295	357	341	380	428	508	548	564	571	579	586
C	350	400	500	500	595	660	750	840	900	950	1000	1050



**KXCA** CAPERUZA ANTIRREVOCO  
**KACA** ANTI-WIND COWL

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
B	245	250	265	275	285	300	385	395	450	460	470	520
C	325	350	375	430	480	530	750	800	900	950	1000	1150




**KXJE** CAPERUZA JET  
**KAJE** JET CAP

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
B	319	363	406	450	538	625	713	800	888	975	1063	1150
C	272	310	349	388	465	543	621	700	779	858	936	1015




**KXCO** CONO  
**KACO** CONE

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
B	190	190	190	190	190	190	250	250	250	250	250	250




**KXTH** TERMINAL SALIDA HORIZONTAL  
**KATH** HORIZONTAL OUTLET

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
B	233	250	268	285	320	355	430	465	490	535	570	605




**KXAM** AMPLIACIÓN  
**KAAM** INCREASER

$\varnothing_{Aint}$	125	150	175	200	250	300	350	400	450	500	550	600
$\varnothing_{Bint}$	150	175	200	250	300	350	400	450	500	550	600	650
L útil	175	175	175	175	175	195	210	210	210	210	210	210




**KXRE** REDUCCIÓN  
**KARE** REDUCTION

$\varnothing_{Aint}$	125	150	175	200	250	300	350	400	450	500	550	600
$\varnothing_{Bint}$	100	125	150	175	200	250	300	350	400	450	500	550
L útil	175	175	175	175	175	175	195	210	210	210	210	210



**KXSB** SOPORTE BASE REGULABLE  
**KASB** ADJUSTABLE BASE SUPPORT

$\varnothing_{int}$	125	150	175	200	250	300	350	400	450	500	550	600
L útil	214	214	214	214	214	214	250	250	250	250	250	250
Bmín	50	50	50	50	50	50	50	50	50	50	50	50
Bmax	80	80	80	80	80	80	80	80	80	80	80	80




**KXSR** SOPORTE BASE REGULABLE  
**KASR** ADJUSTABLE BASE SUPPORT

Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	214	214	214	214	214	214	250	250	250	250	250	250
Bmín	80	80	80	80	80	80	80	80	80	80	80	80
Bmax	280	280	280	280	280	280	280	280	280	280	280	280




**KXSP** PLACA DE SOPORTE BASE  
**KASP** CONSOLE PLATE

Øint	125	150	175	200	250	300	350	400	450	500	550	600
L útil	124	124	124	124	124	124	142	142	142	142	142	142
B	80	80	80	80	80	80	100	100	100	100	100	100




**HISA** SOPORTE MURAL REGULABLE 50 A 80 MM  
ADJUSTABLE WALL SUPPORT 50 TO 80 MM

ØNom	175	200	225	250	300	350	400	450	500	550	600	650
Amin.	50	50	50	50	50	50	50	50	50	50	50	50
Amax.	80	80	80	80	80	80	80	80	80	80	80	80
B	40	40	40	40	40	40	40	40	40	40	60	60




**HIS1** SOPORTE MURAL REGULABLE 80 A 130 MM  
ADJUSTABLE WALL SUPPORT 80 TO 130 MM

ØNom	175	200	225	250	300	350	400	450	500	550	600	650
Amin.	80	80	80	80	80	80	50	50	50	50	50	50
Amax.	130	130	130	130	130	130	130	130	130	130	130	130




**HIS2** SOPORTE MURAL REGULABLE 130 A 210 MM  
ADJUSTABLE WALL SUPPORT 130 TO 210 MM

ØNom	175	200	225	250	300	350	400	450	500	550	600	650
Amin.	130	130	130	130	130	130	130	130	130	130	130	130
Amax.	210	210	210	210	210	210	210	210	210	210	210	210




**HIS4** SOPORTE MURAL REGULABLE 80 A 440 MM  
ADJUSTABLE WALL SUPPORT 80 TO 440 MM

Øext	175	200	225	250	300	350	400	450	500	550	600	650
Amin.	80	80	80	80	80	80	-	-	-	-	-	-
Amax.	440	440	440	440	440	440	-	-	-	-	-	-
B	40	40	40	40	40	40	-	-	-	-	-	-



**HISH** SOPORTE PARA MONTAJE HORIZONTAL INOX  
CEILING SUPPORT STEEL

ØNom	175	200	225	250	300	350	400	450	500	550	600	650
B	40	40	40	40	40	40	40	40	40	40	60	60



**HISF** SOPORTE FORJADO  
JOIST SUPPORT

ØNom	175	200	225	250	300	350	400	450	500	550	600	650
A	150	150	150	150	150	150	150	150	150	150	150	150
B	40	40	40	40	40	40	40	40	40	40	60	60




**KWAP** ABRAZADERA AUTOPORTANTE  
STRUCTURAL LOCKING BAND



Øint	125	150	175	200	250	300	350	400	450	500	550	600
B	140	140	140	140	140	140	-	-	-	-	-	-

**HIPM** PASAMUROS  
WALL SLEEVE




ØNom	175	200	225	250	300	350	400	450	500	550	600	650
ØA	200	225	250	300	350	400	450	500	550	600	650	700
B	325	325	325	325	325	325	325	325	325	325	325	325

**HGNA** PASAMUROS 45° EXTENSIBLE  
WALL SLEEVE 45° ADJUSTABLE




ØNom	175	200	225	250	300	350	400	450	500	550	600	650
ØA	200	225	250	300	325	375	-	-	-	-	-	-
Bmin.	200	200	200	200	200	200	-	-	-	-	-	-
Bmax.	350	350	350	350	350	350	-	-	-	-	-	-

**HILL** COLLARÍN ANTILLUVIA  
COLLAR




ØNom	175	200	225	250	300	350	400	450	500	550	600	650
Øext	275	300	325	350	400	450	525	575	625	675	725	800
Øint	175	200	225	250	300	350	400	450	500	550	600	650
A	100	100	100	100	100	100	125	125	125	125	125	150

**HICR** CUBREAGUAS DE PLOMO 0°- 20°  
LEAD FLASHING 0°- 20°




Ø	175	200	225	250	300	350	400	450	500	550	600	650
A	724	750	786	813	865	917	-	-	-	-	-	-
B	700	725	750	775	825	875	-	-	-	-	-	-
C	185	210	245	270	320	370	-	-	-	-	-	-

**HICS** CUBREAGUAS DE PLOMO 20°- 45°  
LEAD FLASHING 20°- 45°



Ø	175	200	225	250	300	350	400	450	500	550	600	650
A	820	855	903	1000	1000	1000	-	-	-	-	-	-
B	700	725	750	775	825	875	-	-	-	-	-	-
C	185	210	245	270	320	370	-	-	-	-	-	-



**HIPU** PLACA EMBELLECEDORA REDONDA 150 90°  
ROUND FINISHING PLATE 150 90°

$\varnothing_{ext}$	175	200	225	250	300	350	400	450	500	550	600	650
A	180	205	230	255	305	355	-	-	-	-	-	-
B	478	503	528	553	603	653	-	-	-	-	-	-
C	150	150	150	150	150	150	-	-	-	-	-	-



**HIPW** PLACA EMBELLECEDORA REDONDA 150 45°  
ROUND FINISHING PLATE 150 90°

$\varnothing_{ext}$	175	200	225	250	300	350	400	450	500	550	600	650
A	180	205	230	255	305	355	-	-	-	-	-	-
B	478	503	528	553	603	653	-	-	-	-	-	-
C	150	150	150	150	150	150	-	-	-	-	-	-